


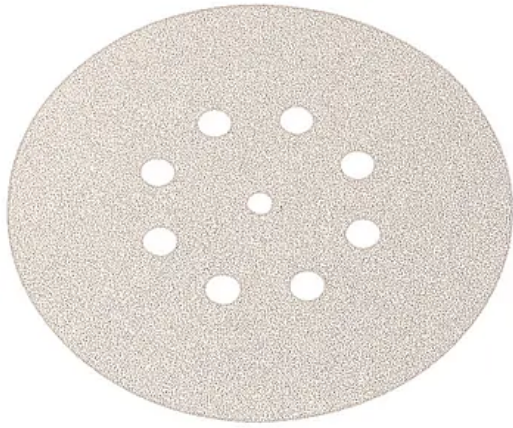

Sanding sheets

perforated, Ø 150 mm, with Velcro rapid attachment

Application: Metal, car bodies, soldered points, welds, fibreglass. Quality: high-performance emery canvas, fully synthetic-resin bonded, corundum. Features: highly stable, high sanding capacity.

Product number: 6 37 28 010 01 6

Technical data

TECHNICAL DATA

Grain

60

No. in pack

50 pcs

Suitable for the following tools

> WPO 14-15 E marine

polishing set